KAATOPUTKI20

Conditioner:
Cleaner:

Zone Configuration

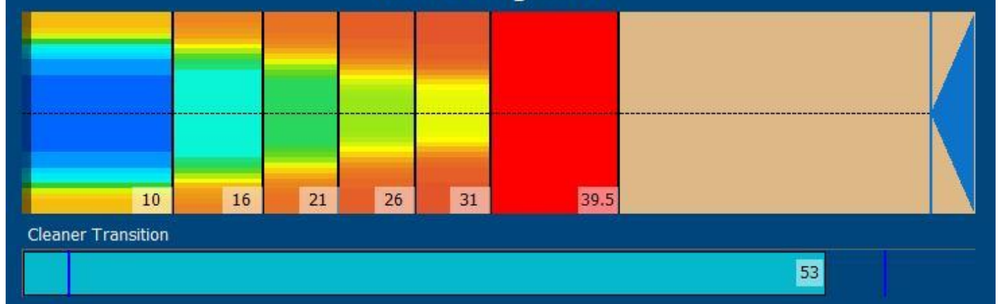

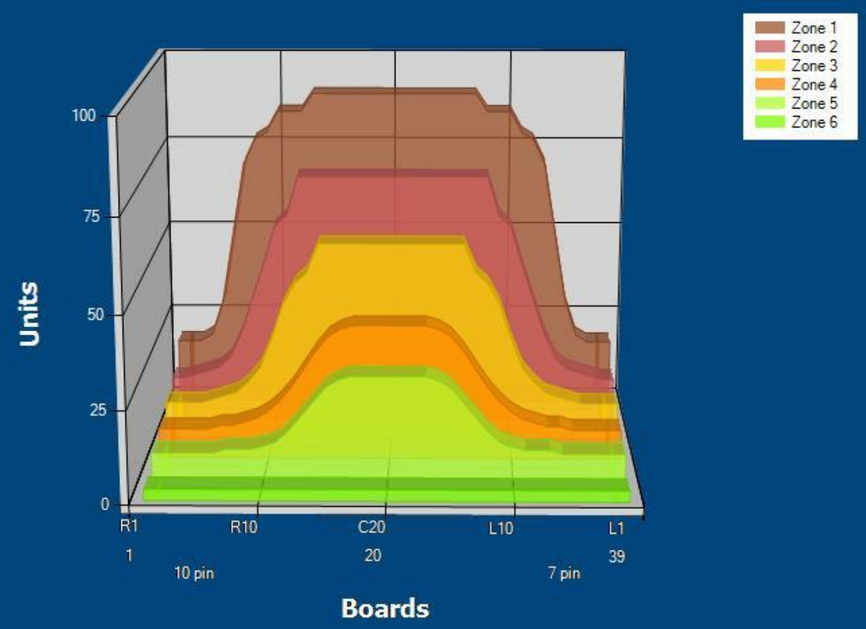

Mode: Clean and Condition
Speed: Quick Clean
Start Cleaner Spray: 0 Feet
Start Squeegee: 0 Feet
Start Conditioning: 6 Inches
Split Pattern: No

Zone 1	Avg	Ratio
Left	37.6	2.4 : 1
Right	37.6	2.4 : 1
Center	90.0	

Zone 2	Avg	Ratio
Left	17.0	4.1 : 1
Right	17.0	4.1 : 1
Center	70.0	

Zone 3	Avg	Ratio
Left	11.2	4.9 : 1
Right	11.2	4.9 : 1
Center	55.0	

Zone 4	Avg	Ratio
Left	8.4	4.4 : 1
Right	8.4	4.4 : 1
Center	37.0	

Zone 5	Avg	Ratio
Left	7.2	3.9 : 1
Right	7.2	3.9 : 1
Center	28.0	

Zone 6	Avg	Ratio
Left	3.0	1.0 : 1
Right	3.0	1.0 : 1
Center	3.0	

Brunswick
PBA — Official Lane Maintenance and Capital Equipment Provider
DIRECT+ Conditioning System
X ENVOY
AUTHORITY22®
Select Machine

Pattern Information

Date	12-Jan-20
Pattern Type	Competitive
Pattern Difficulty	Medium
Pattern Designer	
Pattern Volume (ml)	20,93

Surface Information

Surface Type	Synthetic
Surface Brand	Brunswick Glo Anvil - 3/8"
Age	

Pattern Parameters

Pattern Number	
Pattern Name	Kaatoputki 2020
Mode	Clean & Oil
Forward Speed	Quick Clean
Start Cleaner Spray	0
Start Squeegee	0
Start Oiling	6
Split Pattern	No

Supplies Information

Lane Cleaner	Brunswick Max 10	
Cleaner Mixture Ratio	4 : 1	
Cleaner Transition Distance	42	Authority22
Cleaner Spray End Distance	53	Envoy
Lane Conditioner	Brunswick Defy V30	

Notes

Zone	1	2	3	4	5	6	7	8
Zone End Distance	10	16	21	26	31	39,5		
Zone Ratio L	2,3 : 1	4,1 : 1	4,9 : 1	4,4 : 1	3,8 : 1	1,0 : 1	### : 1	### : 1
Zone Ratio R	2,3 : 1	4,1 : 1	4,9 : 1	4,4 : 1	3,8 : 1	1,0 : 1	### : 1	### : 1
Zone Volume (ml)	10,98	4,52	2,63	1,60	1,20	0,00	0,00	0,00

ZONE	7 Pin Side																																									
	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	C20	R19	R18	R17	R16	R15	R14	R13	R12	R11	R10	R9	R8	R7	R6	R5	R4	R3	R2	R1
1	18	18	18	20	30	50	70	77	79	85	85	85	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	85	85	85	79	77	70	50	30	20	18	18	18
2	12	12	13	14	15	18	25	35	45	56	59	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	59	56	45	35	25	18	15	14	13	12	12
3	10	10	10	10	11	12	13	16	20	28	38	44	47	55	55	55	55	55	55	55	55	55	55	55	55	55	47	44	38	28	20	16	13	12	11	10	10	10	10
4	8	8	8	8	8	9	9	10	11	13	16	20	25	30	34	36	37	37	37	37	37	37	37	36	34	30	25	20	16	13	11	10	9	9	8	8	8	8	8
5	7	7	7	7	7	7	8	8	8	9	10	13	17	21	25	27	28	28	28	28	28	28	28	27	25	21	17	13	10	9	8	8	8	7	7	7	7	7	7
6	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
7																																							
8																																							
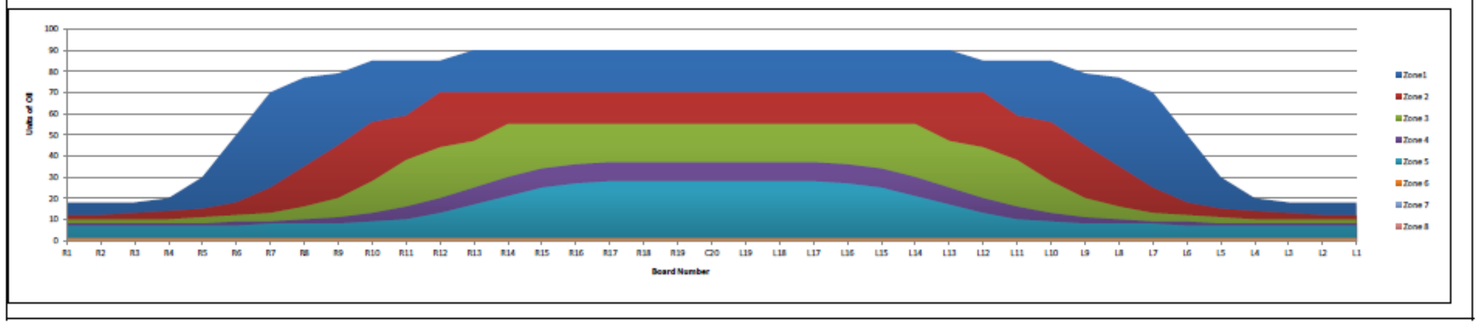
Board Number — 10 Pin Side